




Type (phasing out), 1306 Electric

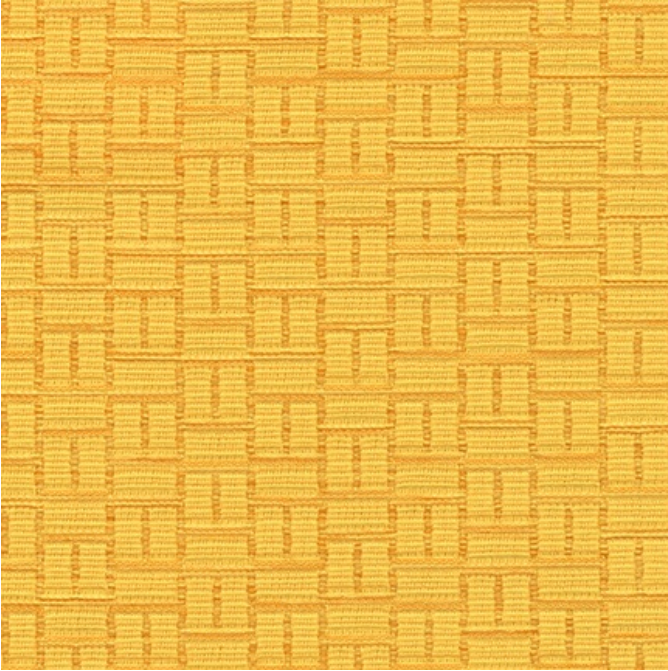

Type (phasing out), 1306 Electric

Content: 90% polyester, 6% pre-consumer recycled polyester, 4% post-consumer recycled polyester

Width: 54"

Abrasion: 100,000 Double Rubs

Breaking Strength: Warp

Lightfastness: 40 Hrs. - Grade 4




Crocking: Dry Grade 4 / Wet Grade 3


Flammability: Passes California TB 117-2013; Section 1 NFPA 260 (Equivalent to UFAC)

Cleaning Code: WS

Lead Time

Fabric Disclaimer Monitors and display settings vary widely between computers. As a result, all fabric colors shown here are approximate and subject to variance from the actual color on physical chairs. For more accurate ideas of color tones, etc. please contact your favorite OM representative to obtain a sample or fabric swatch.

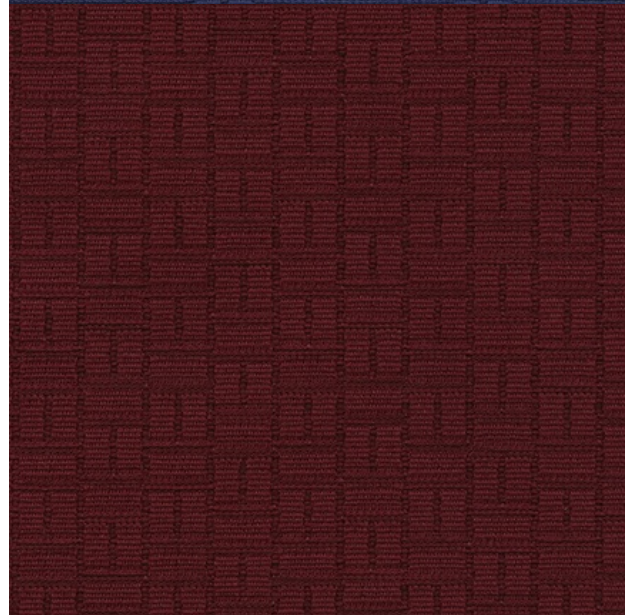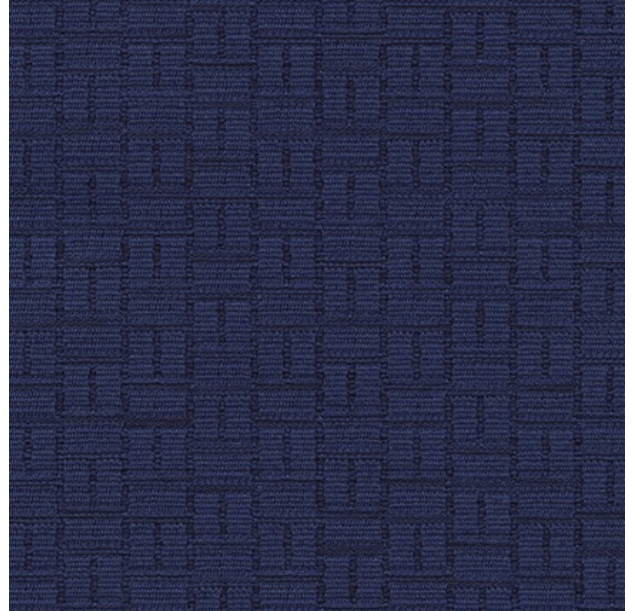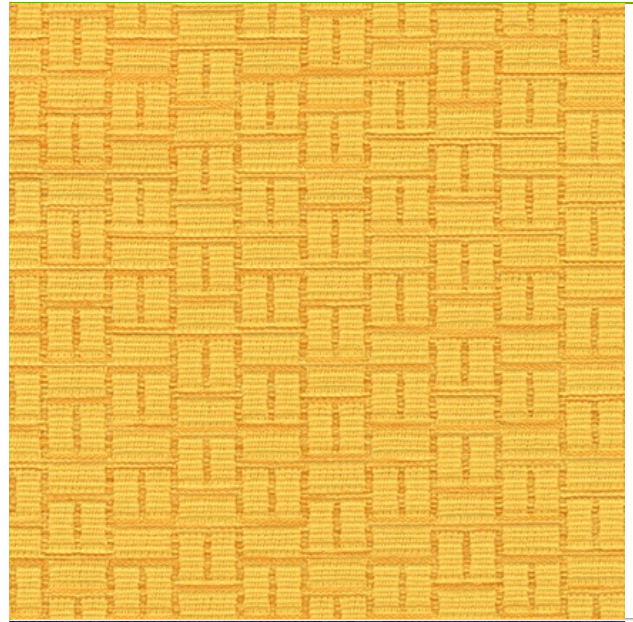

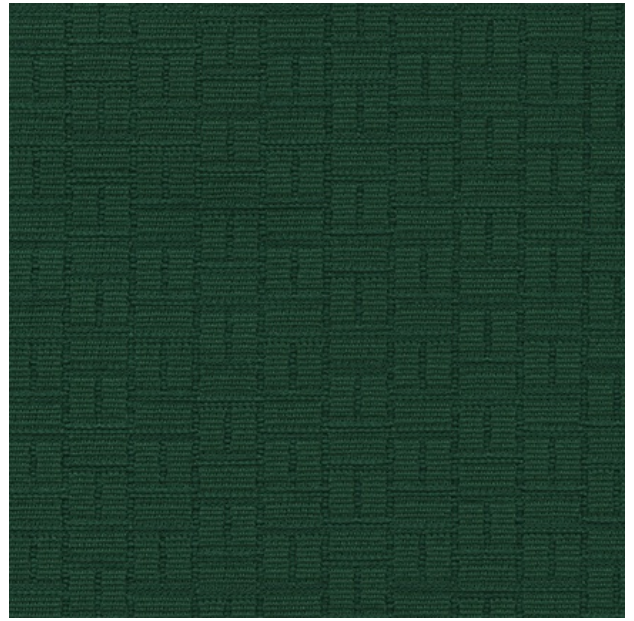

OM SEATING 1110 SOUTH MILDRED AVENUE, ONTARIO, CALIFORNIA 91761 OMSEATING.COM | 877.776.5678 | FAX 909.392.5678