



## Stage , 3V56 Hamilton

### Grade 3

**Content:** 70% Vinyl, 30% Polyester

**Width:** 54"

**Weight:** 30 oz./linear yard

**Backing:** 70% Vinyl Face, 30% Polyester Backing

**Finish:** SILVERGUARD and PERMABLOK

**Repeat:** None

**Directional:** Yes

**Railroaded:** No

**Abrasion:** 930,000 Double Rubs

**Breaking Strength:** Warp 121 lbs. / Fill 72 lbs.


**Crocking:** Dry Class 4 / Wet Class 4

**Lightfastness:** 1000 hours

**Flammability:** Passes Cal 117-2013; NFPA 260/UFAC Class 1; Cal 117 Section E; Boston Fire Dept. Code (BFD IX-1); FAA/FAR 25.853(a) & Appendix F Part I(a)(ii); FMVSS 302; IMO A.652 (16) 8.2 & 8.3; NFPA 701 (small scale); NY/NJ Port Authority; Fed. St.

**191A M 5903; ASTM E662.1; May comply with Cal. Tech. Bul. 133 when combined with appropriate components. :**

**Cleaning Code:** WS, BC

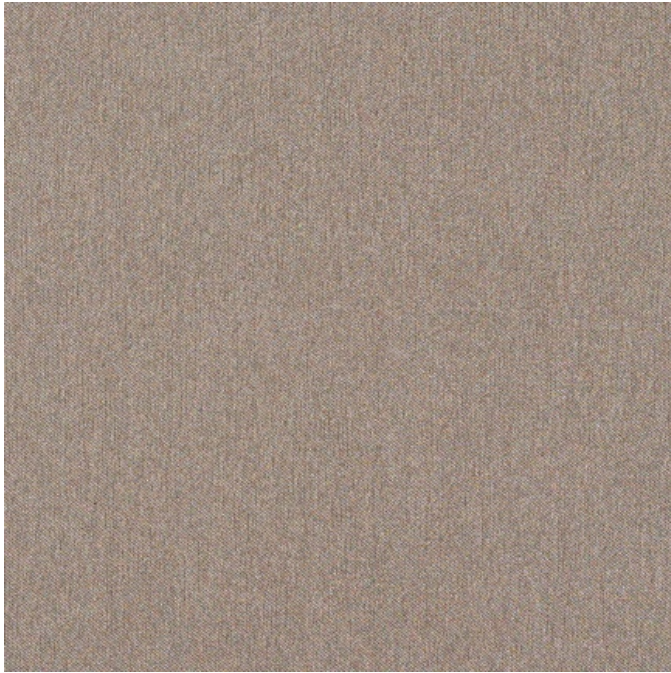

#### Fabric Disclaimer

Monitors and display settings vary widely between computers. As a result, all fabric colors shown here are approximate and subject to variance from the actual color on physical chairs. For more accurate ideas of color tones, etc. please contact your favorite OM representative to obtain a sample or fabric swatch.

#### In Stock



3V50  
Cats



3V52  
Chicago




3V53  
Grease




3V55  
Aida




3V58  
Shrek



3V59  
Fame



3V57  
Phantom



3V56  
Hamilton



3V54  
Frozen